


*Two Stage — Gasoline*

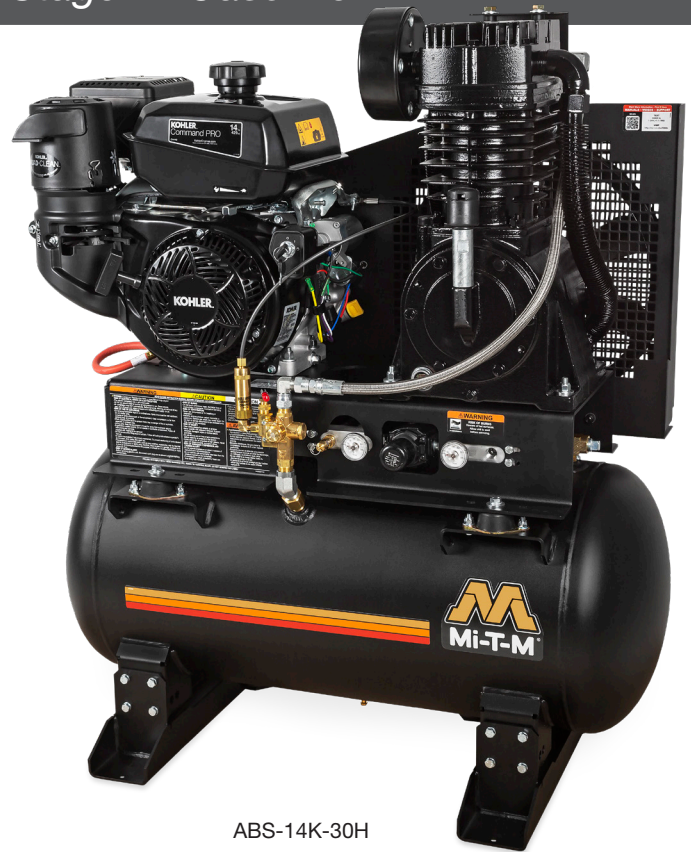

ABS-14K-30H

*Ideal for commercial construction, industrial and automotive industries, the 30-gallon, 80-gallon and base-mount air compressors are designed to provide high capacity air flow. Mount one in a service truck and take it to the most demanding jobsite.*

**Compressor Pump:**

Splash lubricated | Stainless-steel braided discharge hose | Large canister intake filter | Oil level sight indicator

**Engine:**

Electric start – battery and cables not included

**Frame:**

Powder coated ASME coded 30 or 80-gallon receiver tank (Tank-mounted models) | 3/16-inch base plate to reduce vibration | 16-gauge powder coated two-piece belt guard | Removable base plate offers flexible installation

**Components:**

Regulator and two gauges for tank and outlet pressure | ASME safety valves | 16½-inch fly wheel | Tank drain valve | Service truck mount kit (Standard on base-mount models)



UM  
30-Gallon Models



U  
80-Gallon Models

# 30 & 80-Gallon or Base-Mount Air Compressors – Two Stage – Gasoline

## TANK-MOUNTED MODELS

MODEL NUMBER	CFM @ PSI*	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-13H-30H	29.0 @ 175	389cc Honda GX390 OHV	Two stage, cast iron	30-gallon	Pneumatic	38x23x46in.	480 lb.	416 lb.
ABS-14K-30H	29.0 @ 175	429cc Kohler CH440 OHV	Two stage, cast iron	30-gallon	Cable throttle	38x23x46in.	480 lb.	416 lb.
ABS-14M-30H	29.0 @ 175	420cc Mi-T-M OHV	Two stage, cast iron	30-gallon	Pneumatic	38x23x46in.	480 lb.	416 lb.
ABS-13H-80H	29.0 @ 175	389cc Honda GX390 OHV	Two stage, cast iron	80-gallon	Pneumatic	52x26.5x53in.	560 lb.	496 lb.
ABS-14M-80H	29.0 @ 175	420cc Mi-T-M OHV	Two stage, cast iron	80-gallon	Pneumatic	52x26.5x53in.	560 lb.	496 lb.

## BASE-MOUNTED MODELS

MODEL NUMBER	CFM @ PSI*	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-13H-B	29.0 @ 175	389cc Honda GX390 OHV	Two stage, cast iron	Base-mount	Pneumatic	36.5x19x28in.	279 lb.	215 lb.
ABS-14M-B	29.0 @ 175	420cc Mi-T-M OHV	Two stage, cast iron	Base-mount	Pneumatic	36.5x19x28in.	279 lb.	215 lb.

**\*Equipped with 150-PSI maximum rated regulator.**

## Options:

PART NUMBER	DESCRIPTION	FITS MODELS
AX-0077	Battery box and tray - Attaches to engine side of unit	30 & 80-gallon models
IX-0001	Vibration isolator pads - Isolators protect the unit from vibration during use. Recommended for models that are mounted in service truck applications	30 & 80-gallon models
IX-0055	Remote start/choke - 6-ft. wire extension for key switch	Honda models
IX-0059	Remote start/choke - 6-ft. wire extension for key switch, sealed cable	Honda models

## Accessory:

PART NUMBER	DESCRIPTION	FITS MODELS
AW-6000-1002	Equipment cover - Keeps your equipment clean, dry and looking like new	30-gallon & base-mount models

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).