


*Two Stage — Diesel*

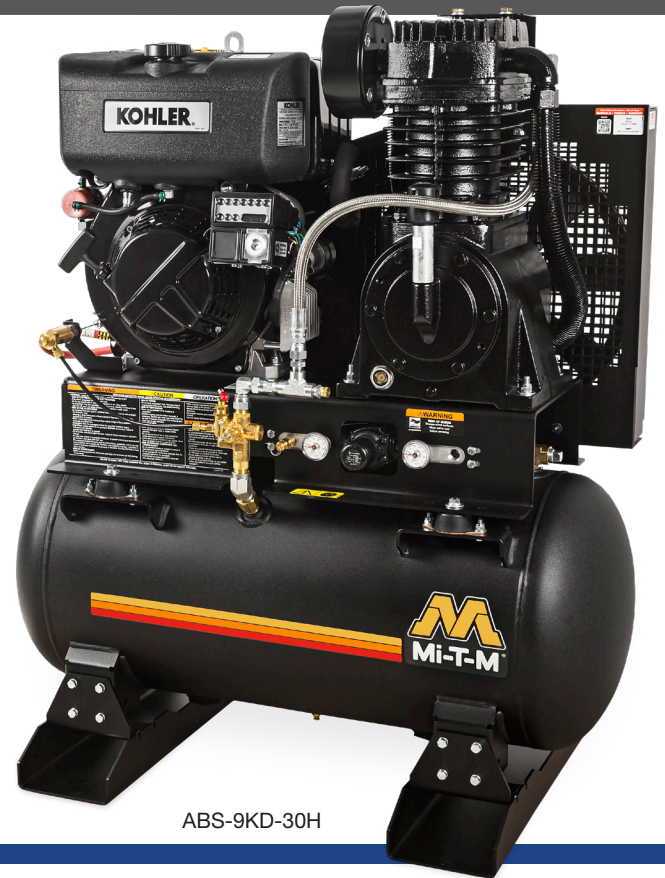

ABS-9KD-30H

*If you rely on compressed air to get your work done, then this diesel-powered machine is the perfect solution. It supplies consistent air flow required for commercial and industrial applications and features a large-capacity ASME coded tank.*

**Compressor Pump:**

Splash lubricated | Stainless-steel braided discharge hose | Large canister intake filter | Oil level sight indicator

**Engine:**

Electric start - battery, box and cables not included | Glow plug equipped for easy starting in cold temperatures

**Frame:**

Powder coated ASME coded 30-gallon receiver tank |  $\frac{3}{16}$ -inch base plate to reduce vibration | 16-gauge powder coated two-piece belt guard | Removable base plate offers flexible installation

**Components:**

Regulator and two gauges for tank and outlet pressure | ASME safety valves | Tank drain valve



# 30-Gallon

## Air Compressors – Two Stage – Diesel

MODEL NUMBER	CFM @ PSI*	HORSEPOWER/ENGINE	COMPRESSOR	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
ABS-9KD-30H	29.0 @ 175	9.1 HP Kohler KD440 OHV	Two stage, cast iron	Cable throttle	38x23x46.5in.	540 lb.	483 lb.

**\*Equipped with 150-PSI maximum rated regulator.**

### Options:

PART NUMBER	DESCRIPTION	FITS MODEL
AX-0079	Battery box, cables and tray - Attaches to engine side of unit	ABS-9KD-30H
IX-0001	Vibration isolator pads - Isolators protect the unit from vibration during use. Recommended for models mounted in service truck applications	ABS-9KD-30H

### Accessory:

PART NUMBER	DESCRIPTION	FITS MODEL
AW-6000-1002	Equipment cover - Keeps your equipment clean, dry and looking like new	ABS-9KD-30H

 **WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).